


# DC Medium Duty Cable Glands




## Technical Specification

<b>Material :</b>	Brass (IS-319) Standard (Al. / S.S. / M.S. also available)
<b>Plating :</b>	Nickle Plated Standard (Chrome also available)
<b>Entry Threads :</b>	BSC Standard (Metric / NPT also available)
<b>Sealing Rubber Ring :</b>	Natural

## Application

Used in normal climatic condition for armoured & unarmoured cables.

## Fitting Sequence:

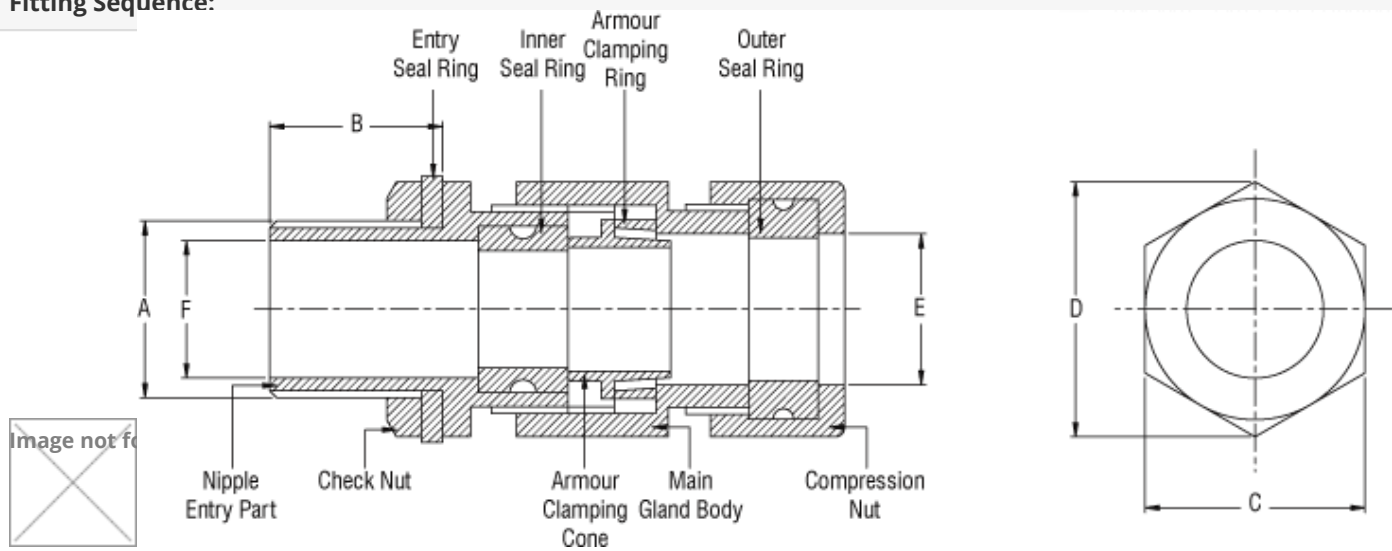

## Table

Suitable Cable Overall Dia		Size		A Nipple Entry	B Length	C(A/F)	D(A/F)	E Dia	F Dia.
From	To	mm	Inches	inches	mm	mm	∅ mm	∅ mm	∅ mm
6.0	9.0	10	3/8"	5/8"	25.0	20.5	23.5	10.0	7.0
6.0	12.0	12	1/2"	5/8"	25.0	23.0	26.0	13.5	11.0
12.0	16.5	16	5/8"	3/4"	25.0	23.0	26.0	16.5	14.0

16.5	18.5	19	3/4"	3/4"	25.0	25.5	29.5	19.0	14.0
18.5	20.0	22	7/8"	7/8"	25.0	28.0	32.0	20.0	14.0
20.0	23.0	25	1"	1"	25.0	31.5	36.0	23.5	19.0
23.0	26.0	28	1 1/8"	1 1/8"	25.0	35.5	41.0	27.0	22.5
26.0	30.0	32	1 1/4"	1 1/4"	25.0	41.0	47.0	32.0	25.5
30.0	33.0	35	1 3/8"	1 1/2"	25.0	44.0	50.5	35.0	27.5
33.0	37.0	38	1 1/2"	1 1/2"	25.0	46.0	53.0	38.0	31.0
37.0	41.0	45	1 3/4"	2"	25.0	57.0	65.5	44.5	42.0
41.0	46.0	50	2"	2"	25.0	61.0	70.5	51.0	42.0
46.0	52.0	57	2 1/4"	2 1/4"	25.0	67.0	77.0	57.0	50.0
52.0	54.0	63	2 1/2"	2 1/2"	25.0	79.0	91.0	63.0	54.5
54.0	61.0	70	2 3/4"	2 3/4"	25.0	82.0	95.0	69.5	62.0
61.0	72.0	75	3"	3"	25.0	90.0	105.0	75.0	65.0
72.0	78.0	82	3 1/4"	3 1/4"	25.0	95.0	109.0	82.0	74.5
78.0	84.0	88	3 1/2"	3 1/2"	25.0	106.0	123.0	88.0	78.0
84.0	94.0	100	4"	4"	25.0	116.0	135.0	98.0	87.0

Tolerance + 1mm